


Metallized polypropylene film capacitor MKP - Switching - High current


Main applications: Storage, high frequency, high ripple current applications, input and output filtering in SMPSSs, resonant circuits, high-end audio applications

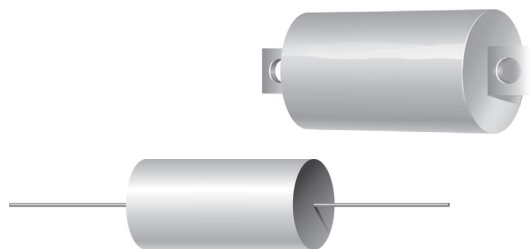

Dielectric	Polypropylene	
Electrodes	Vacuum deposited metal layers	
Coating	UL 510 / CSA TIL I-26 polyester tape wrapping; UL 94 V-0 resin end fill (flame retardant execution)	
Construction	Extended metallized film (refer to general technical information)	
Leads	Tinned copper wire or lugs	
Reference standard	IEC 60384/16, IEC 60068, CECC 30000, CECC 31200, MIL-C 55514/9	
Climatic category	55/100/21(IEC 60068/1), FME (DIN40040)	
Operating temperature range	-55°...+105°C	
Rated capacitance (Cr)	1,0μF to 30μF. Refer to article table	
Capacitance tolerance (at 1kHz)	±10% (code=K), ±5% (code=J) and ±20% (code=M). Other tolerances upon request	
Capacitance temperature coefficient	Refer to graphs in general technical information	
Long term stability (at 1kHz)	Capacitance variation ≤ ±1% after a period of 2 years at standard environmental conditions	
Rated voltage (Ur)	100, 200, 400 Vdc (Permissible AC voltage at 60Hz: 60, 120, 200Vac)	
Category voltage (Uc)	Uc=Ur at +105°C	
Self inductance	≤ 1nH/mm of capacitor and leads length used for connection	
Maximum pulse rise time	Refer to article table	
Dissipation factor (DF), max.	tgδ x10 ⁻⁴ measured at 25±5°C: ≤ 0,0010 at 1kHz	
Insulation resistance (IR)	When measured between terminals, at 25±°C, after 1 minute of electrification at 100Vdc: IR ≥ 100'000s.	
Test voltage between terminals (Ut)	1.6xUr (DC) applied for 2s at 25±5°C (1 minute for type test)	
Damp heat test (steady state)	Test conditions: Temperature= +40±2°C Relative humidity= 93±2% Test Duration= 21 days	Performance: Capacitance change ≤ ±2% DF change ≤ 0,0010 at 1kHz IR ≥ 50% of initial limit value
Endurance test	Test conditions: Temperature= +85±2°C Test duration= 1000h Voltage applied= 1,25 x Ur(DC)	Performance: Capacitance change ≤ ±3% DF change ≤ 0,0010 at 1kHz IR ≥ 50% of initial limit value
Resistance to soldering heat (wire style only)	Test conditions: Solder bath temperature= +260±5°C Dipping time (with heat screen)= 10±1s	Performance: Capacitance change ≤ ±1% DF change ≤ 0,0010 at 1kHz IR ≥ 50% of limit value

Warning

This specification must be completed with the data given in the
“General technical information” chapter

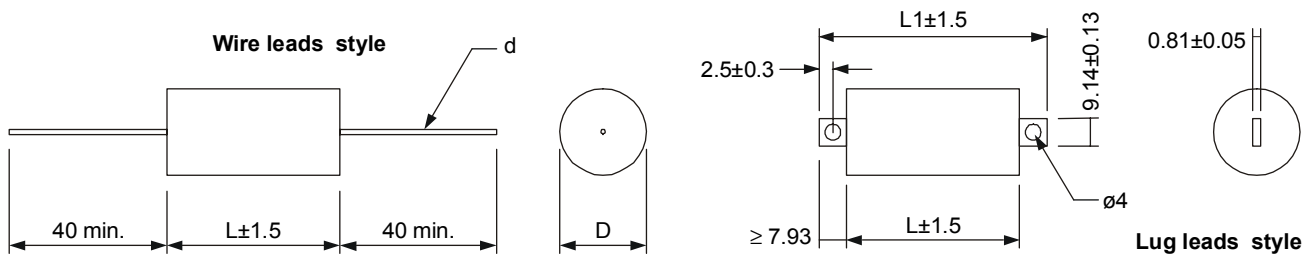

MPH wire leads style article table (different values available upon request)

Vdc	Vpk	Cap. μF	Dim. (mm)			dV/dt V/μs	l _{pk} A	Maximum ripple current (A r.m.s.) 20-100 kHz ⁽²⁾								ESR ⁽³⁾ mΩ	ICEL Code ⁽¹⁾
			Dmax.	L	d			+25°C	+35°C	+45°C	+55°C	+65°C	+75°C	+85°C			
100	200	1	13,4	19	0,8	10	10	9,2	8,5	7,8	7	6	4,9	4,5	15	MPH1104100*D	
100	200	2	15,1	24	0,8	10	20	10,8	10	9,1	8,2	7	5,8	5,3	12	MPH1104200*E	
100	200	3	18,2	24	1	10	30	12,1	11,2	10,3	9,2	8	6,5	5,9	11	MPH1104300*E	
100	200	5	18,6	32	1	10	50	13,8	12,7	11,6	10,4	9	7,4	6,7	10	MPH1104500*J	
100	200	10	22,8	38	1	10	100	15	15	14,2	12,7	11	9	8,2	9	MPH1105100*L	
100	200	20	25,4	57	1	10	200	15	15	15	15	13,6	11,1	10	8	MPH1105200*S	
100	200	30	30,4	57	1	10	300	15	15	15	15	15	12,4	11,4	6	MPH1105300*S	
200	400	1	13	32	0,8	15	15	7,3	7,3	7,3	7,3	7,2	5,9	5,4	20	MPH1204100*J	
200	400	2	17,7	32	0,8	15	30	12	12	11,3	10,1	8,7	7,1	6,5	15	MPH1204200*J	
200	400	3	18,9	38	1	15	45	15	13,8	12,6	11,3	9,8	8	7,3	13	MPH1204300*L	
200	400	5	21,8	44	1	15	75	15	15	14,7	13,1	11,4	9,3	8,5	11	MPH1204500*N	
200	400	10	26,1	57	1	15	150	15	15	15	15	13,8	11,1	10	9	MPH1205100*S	
200	400	20	36,5	57	1	15	300	15	15	15	15	15	14,1	12,8	6	MPH1205200*S	
400	800	1	18,1	38	1	20	20	9,5	9,5	9,5	9,5	9,5	7,8	7,1	19	MPH1404100*L	
400	800	2	22,7	44	1	20	40	15	15	15	13,4	11,6	9,5	8,7	15	MPH1404200*N	
400	800	3	27,5	44	1	20	60	15	15	15	15	13,1	10,7	9,8	12	MPH1404300*N	
400	800	5	30,2	57	1	20	100	15	15	15	15	15	12,5	11,4	10	MPH1404500*S	
400	800	10	42,3	57	1	20	200	15	15	15	15	15	15	14,1	6	MPH1405100*S	

(1) Change the * symbol with the needed capacitance tolerance code: J=±5%, K=±10%, M=±20%

(2) Maximum ripple current as function of case temperature. (3) Max values for f=20÷100kHz

MPHL lug leads style article table (different values available upon request)

Vdc	Vpk	Cap. μF	Dim. (mm)			dV/dt V/μs	l _{pk} A	Maximum ripple current (A r.m.s.) 20-100 kHz ⁽²⁾								ESR ⁽³⁾ mΩ	ICEL Code ⁽¹⁾
			Dmax.	L	L1			+25°C	+35°C	+45°C	+55°C	+65°C	+75°C	+85°C			
100	200	2	15,1	29	46,45	10	20	12	11	10	8,9	7,8	6,3	5,8	12	MPH1104200*HL	
100	200	3	18,2	29	46,45	10	30	13,3	12,3	11,2	10	8,7	7,1	6,5	11	MPH1104300*HL	
100	200	5	18,6	36	54,35	10	50	14,8	13,7	12,5	11,2	9,7	7,9	7,2	10	MPH1104500*KL	
100	200	10	22,8	44	60,7	10	100	17,8	16,5	15	13,5	11,7	9,5	8,7	9	MPH1105100*NL	
100	200	20	25,4	60	79,75	10	200	21,6	20	18,3	16,4	14,2	11,6	10,6	8	MPH1105200*TL	
100	200	30	30,4	60	79,75	10	300	24,3	22,5	20,5	18,4	15,9	13	11,9	6	MPH1105300*TL	
200	400	2	17,7	36	54,35	15	30	14,3	13,2	12,1	10,8	9,4	7,7	7	15	MPH1204200*KL	
200	400	3	18,9	44	60,7	15	45	15,9	14,7	13,5	12	10,4	8,5	7,8	13	MPH1204300*NL	
200	400	5	21,8	47	67	15	75	18,3	17	15,5	13,9	12	9,8	8,9	11	MPH1204500*OL	
200	400	10	26,1	60	79,75	15	150	22,4	20,7	18,9	16,9	14,6	12	10,9	9	MPH1205100*TL	
200	400	20	36,5	60	79,75	15	300	27,4	25,4	23,2	20,7	17,9	14,7	13,4	6	MPH1205200*TL	
400	800	1	18,1	44	60,7	20	20	9,5	9,5	9,5	9,5	9,5	8,3	7,5	19	MPH1404100*NL	
400	800	2	22,7	47	67	20	40	15	15	15	14,2	12,3	10	9,1	15	MPH1404200*OL	
400	800	3	27,5	47	67	20	60	21,1	19,5	17,8	15,9	13,8	11,3	10,3	12	MPH1404300*OL	
400	800	5	30,2	60	79,75	20	100	24,4	22,6	20,6	18,5	16	13,1	11,9	10	MPH1404500*TL	
400	800	10	42,3	60	79,75	20	200	30	27,8	25,4	22,7	19,7	16,1	14,7	6	MPH1405100*TL	

(1) Change the * symbol with the needed capacitance tolerance code: J=±5%, K=±10%, M=±20%

(2) Maximum ripple current as function of case temperature. (3) Max values for f=20÷100kHz